



EVB80104-A2

Short Description

Contents

1. Scope	2
2. Melexis Softdist Server	2
3. MLX80104/05KLW - Overview	3
3.1. <i>Application Examples</i>	3
3.2. <i>Hardware Features</i>	3
4. EVB - General Description	4
5. EVB - Hardware overview	4
5.1. <i>EVB - Application Connector CON1</i>	5
5.2. <i>EVB – Available Add-on boards</i>	6
6. Revision History	7
7. Disclaimer	8

1. Scope

This document is intended to give a brief introduction of the EVB80104-A2 Evaluation Board (EVB). This EVB is equipped with the MLX80108H QFN28 6x6.

Beside of this document, several other important documentation papers are necessary for a detailed understanding.

The detailed information regarding our products including all required development tools will be distributed via the Melexis Softdist server (<https://softdist.melexis.com>).

2. Melexis Softdist Server

Melexis SoftDist (<https://softdist.melexis.com>) is a software distribution system which allows customers to download documents, development software and other stuff related to Melexis products. In case updates or new items are available a notification email will be send automatically to all subscribers.

It's required to register in order to access the Melexis Softdist server.

In case you are not registered yet, please contact our sales team and specify which Melexis product you are interested in, in order to create an account and grant access to the correct product specific information:

Europe, Africa	Email : sales_europe@melexis.com
Americas	Email : sales_usa@melexis.com
Asia	Email : sales_asia@melexis.com

3. MLX80104/05KLW - Overview

3.1. Application Examples

- LIN slave for switch applications
- LIN slave for IO-Extension

3.2. Hardware Features


- 16-bit MULAN MCU
 - 16kB ROM (MLX80104)
 - 16kB OTP (MLX80105)
 - 512 Byte RAM
 - 192 Byte EEPROM with ECC
- LIN Protocol Controller according to LIN 2.x and SAE J2602
- LIN Transceiver according to LIN 2.x and SAE J2602
- 10x SW high voltage I/O pins
 - fully configurable high current/high voltage inputs/outputs (7mA/26.5V)
 - configurable pull up or pull down characteristics
 - Wake up sources
- 8x IO high voltage I/O pins
 - fully configurable high current/high voltage inputs/outputs (7mA/26.5V)
 - configurable pull up or pull down characteristics
 - PWM outputs (8-bit, 80Hz to 30kHz)
 - 10-bit ADC inputs
 - Interrupt capable Inputs
 - Interrupt capability
 - Wake up sources
- Constant current output (2mA) for external low voltage loads via bipolar transistor
- Integrated window watchdog and additional independent analogue watchdog
- Integrated Voltage Regulator
- Integrated RC-Oscillator
- QFN28 5x5 package
- Designed for automotive applications
- Ready-to-use firmware (UniROM)

4. EVB - General Description

The EVB80104-A2 is equipped with an MLX80108H QFN28 6x6. The MLX80108H is a FLASH version of the MLX80104/05. This device can only be used for software development. It is not allowed to use this device for production, EMC or LIN conformance tests.

The EVB can be used to develop MLX80104/05 firmware.

5. EVB - Hardware overview

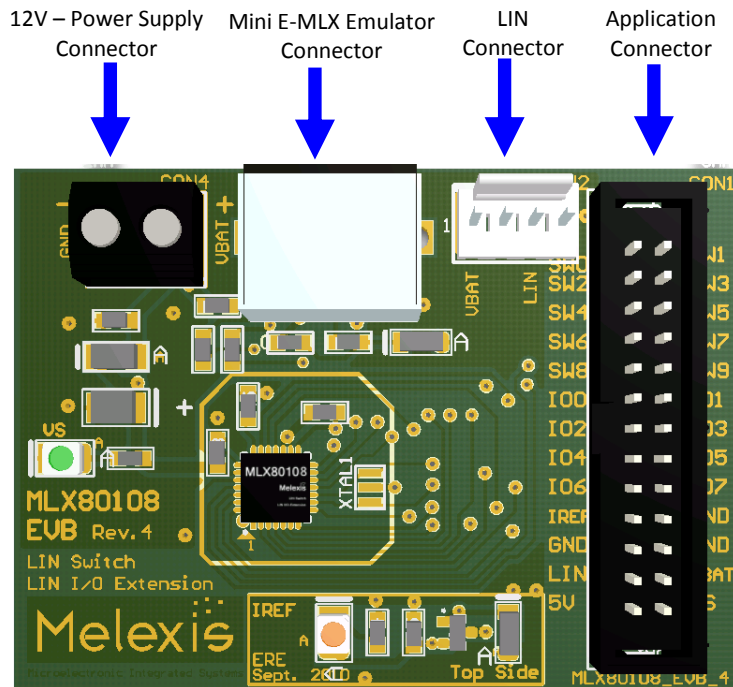

5.1. EVB - Application Connector CON1




Figure 1 Application Connector - IDC MALE (Top view)


Pin	Name	Description
1	SW0	Configurable: Switch Matrix, Single Switch, Output
2	SW1	Configurable: Switch Matrix, Single Switch, Output
3	SW2	Configurable: Switch Matrix, Single Switch, Output
4	SW3	Configurable: Switch Matrix, Single Switch, Output
5	SW4	Configurable: Switch Matrix, Single Switch, Output
6	SW5	Configurable: Switch Matrix, Single Switch, Output
7	SW6	Configurable: Switch Matrix, Single Switch, Output
8	SW7	Configurable: Switch Matrix, Single Switch, Output
9	SW8	Configurable: Switch Matrix, Single Switch, Output
10	SW9	Configurable: Switch Matrix, Single Switch, Output
11	IO0	Configurable: Single Switch, Output, PWM, A/D, Rotary
12	IO1	Configurable: Single Switch, Output, PWM, A/D, SPI
13	IO2	Configurable: Single Switch, Output, PWM, A/D, Rotary
14	IO3	Configurable: Single Switch, Output, PWM, A/D, SPI
15	IO4	Configurable: Single Switch, Output, PWM, A/D, SPI
16	IO5	Configurable: Single Switch, Output, PWM, A/D, Rotary
17	IO6	Configurable: Single Switch, Output, PWM, A/D, SPI
18	IO7	Configurable: Single Switch, Output, PWM, A/D, Rotary
19	IREF	Current Source for Creating External Supply Voltages
20	GND	System ground
21	GND	System ground
22	GND	System ground
23	LIN	Connection to LIN Bus
24	VBAT	12V Power Supply (Not Reverse Polarity Protected)
25	V5	Output from IREF supply
26	VS	Voltage After Polarity Protection Diode / Chip Supply Voltage

Table 1 EVB Application Connector

5.2. EVB – Available Add-on boards

Part	Picture
------	---------

EVB80104-B
 (Add-on for:
 EVB80104-A1
 EVB80104-A2
 EVB80104-A3)

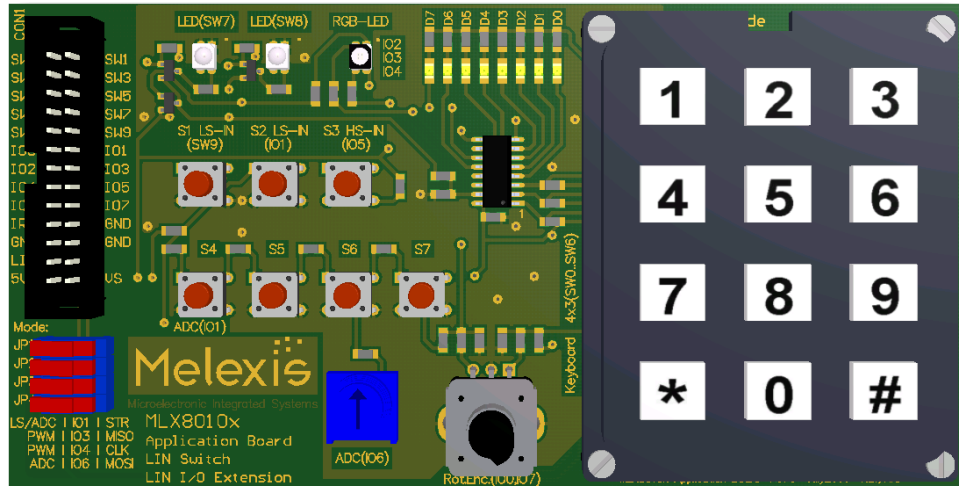

6. Revision History

Version	Changes	Remark	Date
001		Initial release	25.07.18

7. Disclaimer

The information furnished by Melexis herein is believed to be correct and accurate. Melexis disclaims (i) any and all liability in connection with or arising out of the furnishing, performance or use of the technical data or use of the product as described herein, (ii) any and all liability, including without limitation, special, consequential or incidental damages, and (iii) any and all warranties, express, statutory, implied, or by description, including warranties of fitness for particular purpose, non-infringement and merchantability. No obligation or liability shall arise or flow out of Melexis' rendering of technical or other services.

The information contained herein is provided "as is" and Melexis reserves the right to change specifications and/or any other information contained herein at any time and without notice. Therefore, before placing orders and/or prior to designing this product into a system, users or any third party should obtain the latest version of the relevant information to verify that the information being relied upon is current. This document supersedes and replaces all prior information regarding the product(s) as described herein and/or previous versions of this document.

Users or any third party must further determine the suitability of the Melexis' product(s) described herein for its application, including the level of reliability required and determine whether it is fit for a particular purpose.

The information contained herein is proprietary and/or confidential information of Melexis. The information contained herein or any use thereof does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information.

This document as well as the product(s) described herein may be subject to export control regulations. Please be aware that export might require a prior authorization from competent authorities.

The product(s) as described herein is/are intended for use in normal commercial applications. Unless otherwise agreed upon in writing, the product(s) described herein are not designed, authorized or warranted to be suitable in applications requiring extended temperature range, unusual environmental requirements. High reliability applications, such as medical life-support or life-sustaining equipment are specifically not recommended by Melexis.

The product(s) may not be used for the following applications subject to export control regulations: the development, production, processing, operation, maintenance, storage, recognition or proliferation of 1) chemical, biological or nuclear weapons, or for the development, production, maintenance or storage of missiles for such weapons; 2) civil firearms, including spare parts or ammunition for such arms; 3) defense related products, or other material for military use or for law enforcement; 4) any applications that, alone or in combination with other goods, substances or organisms could cause serious harm to persons or goods and that can be used as a means of violence in an armed conflict or any similar violent situation.

Products sold by Melexis are subject to the terms and conditions as specified in the Terms of Sale, which can be found at <https://www.melexis.com/en/legal/terms-and-conditions>.

Melexis NV © - No part of this document may be reproduced without the prior written consent of Melexis. (2016)