

V7.1/01-2025




International Presence

www.melexis.com/sales-contact

Europe, Middle East and Africa
sales_europe@melexis.com

Asia and Oceania
sales_asia@melexis.com

Americas
sales_usa@melexis.com

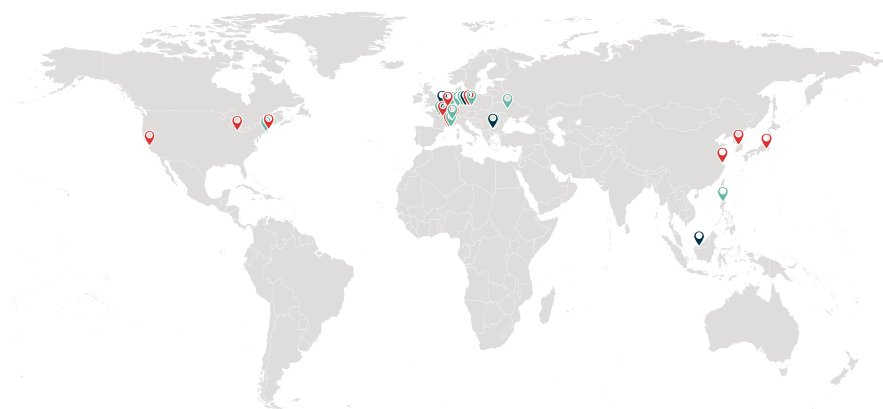

-  Research & Development
-  Sales & Applications
-  Manufacturing




WWW.MELEXIS.COM



SELECTION GUIDE

PRESSURE SENSOR

Micro-machined, versatile, both absolute and relative pressure sensor IC solutions suitable for a variety of pressure ranges, outstanding in terms of longterm stability and compact size.

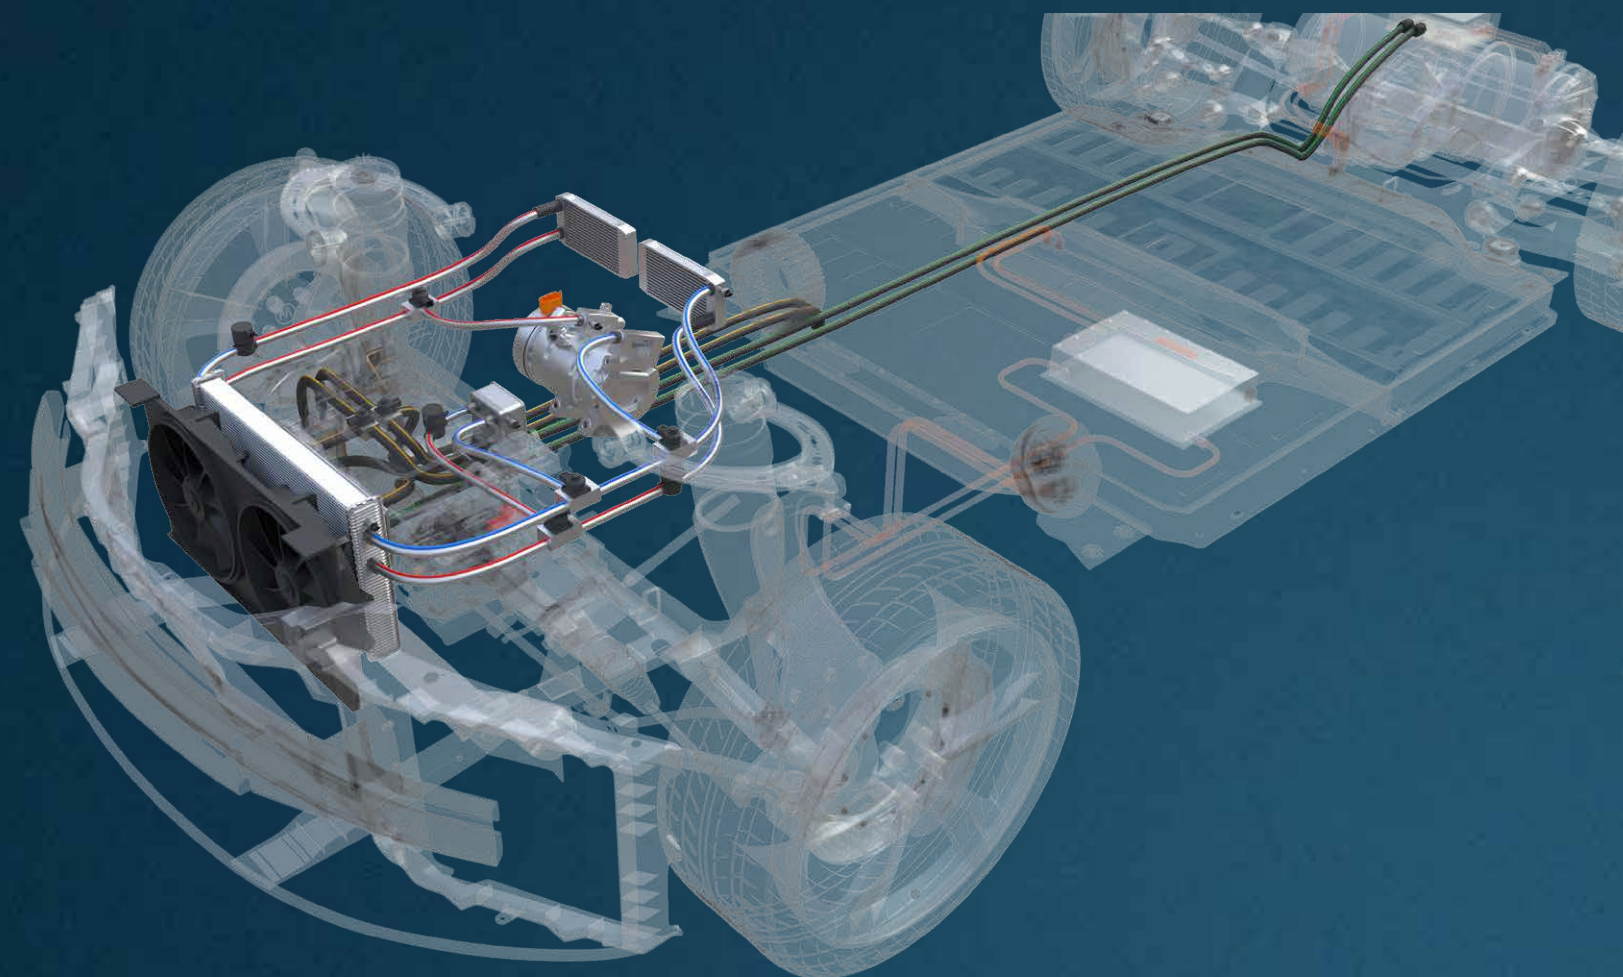

WWW.MELEXIS.COM/PRESSURE-SENSOR-ICS

Melexis pressure sensors													
	Part No.	Type	Status	Package type	Factory calibrated	Output type	Harsh media (corrosive gases)	Calibrated transfer function	Calibratable pressure spans	Operating temp. (min)	Operating temp. (max)	Operating supply voltage (min)	Operating supply voltage (max)
Standard SMD	MLX90809LXG-EAD-000	Relative	Prod	SOIC16	✓	Analog ratiometric		0.05 to -1.05 bar relative pressure / 0.5 to 4.5 V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90809LXG-EAD-003	Relative	Prod	SOIC16	✓	Analog ratiometric		0 to 1 bar relative pressure / 0.5 to 4.5 V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90809LXG-EAD-007	Relative	Prod	SOIC16	✓	Analog ratiometric		0 to -1 bar relative pressure / 0.5 to 4.5 V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90809LXG-EAD-100	Relative	Prod	SOIC16	✓	Digital SENT		0.05 to -1.2 bar relative pressure / 193 to 3896 LSB SENT output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90821LXG-DBA-003	Relative	Prod	SOIC16	✓	Analog ratiometric		-0.06 to 0.26 bar relative pressure / 0.5V to 4.5 V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90821LXG-DBA-005	Relative	Prod	SOIC16	✓	Analog ratiometric		-0.05 to 0.05 bar relative pressure / 0.5 V to 4.5 V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90821LXG-DBA-006	Relative	Prod	SOIC16	✓	Analog ratiometric		-0.2 to 0.5 bar relative pressure / 4.5 V to 0.5 V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90821LXG-DBA-007	Relative	Prod	SOIC16	✓	Analog ratiometric		-0.1 to 0.1 bar relative pressure / 0.5 V to 4.5 V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90821VXG-DBA-008	Relative	Prod	SOIC16	✓	Analog ratiometric		-0.0375 to 0.0125 bar relative pressure / 4.5 V to 0.5 V analog output	-	-40 °C	115 °C	4.5 V	5.5 V
	MLX90821LXG-DBA-100	Relative	Prod	SOIC16	✓	Digital SENT		-0.06 to 0.26 bar relative pressure / 193 to 3896 LSB SENT output / NTC	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90817LXE-DBG-001	Absolute	Prod	DFN14	✓	Analog ratiometric		0.5 to 4 bar absolute pressure / 0.5 V to 4.5 V output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90817LXE-DBG-003	Absolute	Prod	DFN14	✓	Analog ratiometric		0.2 to 5.5 bar absolute pressure / 0.5 V to 4.5 V output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90817LXE-DBH-008	Absolute	Prod	DFN14	✓	Analog ratiometric		0.1 to 1.15 bar absolute pressure / 0.4 V to 4.65 V output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90817LXE-DBG-010	Absolute	Prod	DFN14	✓	Analog ratiometric		0.2 to 2.5 bar absolute pressure / 0.2 V to 4.8 V output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90817LXE-DBG-012	Absolute	Prod	DFN14	✓	Analog ratiometric		0.2 to 3 bar absolute pressure / 0.4 V to 4.65 V output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90817LXE-DBH-014	Absolute	Prod	DFN14	✓	Analog ratiometric		0.133 to 1.199 bar absolute pressure / 1 V to 4.2 V output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90817LXE-DCG-000	Absolute	Prod	DFN14	✓	Analog ratiometric	✓	0.2 to 4 bar absolute pressure / 0.4 V to 4.65 V output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90817LXE-DCH-008	Absolute	Prod	DFN14	✓	Analog ratiometric	✓	0.1 to 1.15 bar absolute pressure / 0.4 V to 4.65 V output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90818LXE-BBG-015	Absolute	Prod	DFN14	✓	Digital SENT	✓	0.1 to 4 bar absolute pressure / 193 to 3896 LSB SENT output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90818LXE-BBG-016	Absolute	Prod	DFN14	✓	Digital SENT	✓	0.1 to 3 bar absolute pressure / 193 to 3896 LSB SENT output / NTC	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90818LXE-BBG-017	Absolute	Prod	DFN14	✓	Digital SENT	✓	0.1 to 4 bar absolute pressure / 193 to 3896 LSB SENT output / NTC	-	-40 °C	150 °C	4.5 V	5.5 V
Bare die	MLX90819LUF-EBA-000	Relative	Prod	Bare die		Analog ratiometric / Digital SENT			10 - 35 bar full span	-40 °C	150 °C	4.5 V	5.5 V
	MLX90819LUF-EBB-000	Relative	Prod	Bare die		Analog ratiometric / Digital SENT			30 - 50 bar full span	-40 °C	150 °C	4.5 V	5.5 V
	MLX90820LUF-EBA-000	Absolute	Prod	Bare die		Analog ratiometric / Digital SENT			10 - 35 bar full span	-40 °C	150 °C	4.5 V	5.5 V
	MLX90820LUF-EBB-000	Absolute	Prod	Bare die		Analog ratiometric / Digital SENT			30 - 50 bar full span	-40 °C	150 °C	4.5 V	5.5 V
PCB-less	MLX90822GXP-BAA-300	Absolute	Prod	SMP-7	✓	Analog ratiometric	✓	0.1 to 1.15 bar absolute pressure / 0.5 V to 4.5 V output	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90822GXP-BAB-301	Absolute	Prod	SMP-7	✓	Analog ratiometric	✓	0.1 to 3 bar absolute pressure / 0.5 V to 4.5 V output	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90822GXP-BAB-302	Absolute	Prod	SMP-7	✓	Analog ratiometric	✓	0.1 to 4 bar absolute pressure / 0.5 V to 4.5 V output	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90822GXP-BAA-304	Absolute	Prod	SMP-7	✓	Analog ratiometric	✓	0.1 to 1.15 bar absolute pressure / 0.4 V to 4.65 V output	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90823GXP-BAD-301	Relative	Prod	SMP-7	✓	Analog ratiometric	✓	-0.2 to 0.5 bar relative pressure 0.5V to 4.5V analog output	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90823GXP-BAF-305	Relative	Prod	SMP-7	✓	Analog ratiometric	✓	-0.017 to 0.345 bar relative pressure 0.5V to 4.5V analog output	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90823GXP-BAD-306	Relative	Prod	SMP-7	✓	Analog ratiometric	✓	0 to -1.0 bar relative pressure 0.5V to 4.5V analog output	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90823GXP-BAD-308	Relative	Prod	SMP-7	✓	Analog ratiometric	✓	0 to 1.0 bar relative pressure 0.5V to 4.5V analog output	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90824GXP-DAC-300	Absolute	Prod	SMP-7	✓	Digital SENT	✓	0.1 to 1.15 bar absolute pressure / 193 to 3896 LSB SENT output / NTC	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90824GXP-DAD-301	Absolute	Prod	SMP-7	✓	Digital SENT	✓	0.1 to 3 bar absolute pressure / 193 to 3896 LSB SENT output / NTC	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90824GXP-DAD-302	Absolute	Prod	SMP-7	✓	Digital SENT	✓	0.1 to 4 bar absolute pressure / 193 to 3896 LSB SENT output / NTC	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90825GXP-DAD-300	Relative	Prod	SMP-7	✓	Digital SENT	✓	-0.2 to 0.8 bar relative pressure / 193 to 3896LSB SENT output / No NTC	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90825GXP-DAD-302	Relative	Prod	SMP-7	✓	Digital SENT	✓	0 to 0.5 bar relative pressure / 193 to 3896LSB SENT output / No NTC	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90825GXP-DAD-400	Relative	Prod	SMP-7	✓	Digital SENT	✓	-0.2 to 0.8 bar relative pressure / 193 to 3896LSB SENT output / Master / No NTC	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90825GXP-DAD-500	Relative	Prod	SMP-7	✓	Digital SENT	✓	-0.2 to 0.8 bar relative pressure / UART output / Slave / No NTC	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90825GXP-DAD-404	Relative	Prod	SMP-7	✓	Digital SENT	✓	-0.3 to 1 bar relative pressure / 193 to 3896LSB SENT output / Master / No NTC	-	-40 °C	160 °C	4.5 V	5.5 V
	MLX90825GXP-DAD-504	Relative	Prod	SMP-7	✓	Digital SENT	✓	-0.3 to 1 bar relative pressure / UART output / Slave / No NTC	-	-40 °C	160 °C	4.5 V	5.5 V
Triphibian™	MLX90830-LXZ-BAH-001	Absolute	Prod	SOIC16 up	✓	Analog ratiometric		0 to 10.342 bar (= 150PSI) absolute pressure / 0.5 to 4.5V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90830-LXZ-BAF-002	Absolute	Prod	SOIC16 up	✓	Analog ratiometric		0 to 34.474 bar (= 500PSI) absolute pressure / 0.5 to 4.5V analog output	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90833-LXZ-BAE-003	Absolute	Prod	SOIC16 up	✓	Digital LIN		0 to 12 bar / 193 to 3896LSB / NTC	-	-40 °C	150 °C	6 V	18 V
	MLX90833-LXZ-BAF-002	Absolute	Prod	SOIC16 up	✓	Digital LIN		0 to 36 bar / 193 to 3896LSB / NTC	-	-40 °C	150 °C	6 V	18 V
	MLX90834-LXG-DAH-003	Absolute	Prod	SOIC16 down	✓	Digital SENT		0 to 12 bar / 193 to 3896LSB / NTC	-	-40 °C	150 °C	4.5 V	5.5 V
	MLX90834-LXG-DAF-004	Absolute	Prod	SOIC16 down	✓	Digital SENT		0 to 36 bar / 193 to 3896LSB / NTC	-	-40 °C	150 °C	4.5 V	5.5 V

SMD SOLUTIONS



PCB-LESS SOLUTIONS



BARE DIE

